

Successor to the HWT2

Greater safety when requesting a stop.

The new CANEO seriesSR stop request buttons have been specially developed for urban and long-distance transit – barrier-free, intuitive to use, and built to last.

The new generation of stop request buttons offers maximum safety and comfort for all passengers – in compliance with public transit accessibility requirements.

Thanks to its compact design without visible screws, the unit is protected against tampering and features a hygienic, chemical-resistant surface. Bright LEDs, customizable symbols, Braille, and an audible signal ensure clear and unmistakable feedback.

The serieSR is designed for flexible installation on poles (Ø 30–35 mm) or walls.

[Go to product](#)



Seamless conversion

Easy conversion with existing mounting holes and connection cables. The uniform circuit board reduces variants.



Innovative design & engineering

Compact and flat design – no visible screws. Optimized sensor logic protects against false triggers.



Safety & comfort

Bright LEDs, symbols, and an optional audible signal ensure barrier-free stopping (dual-sensory principle).




Wear-free

No moving parts, so it's super durable and maintenance-free – comes with a 5-year warranty.

HWT2



seriesSR

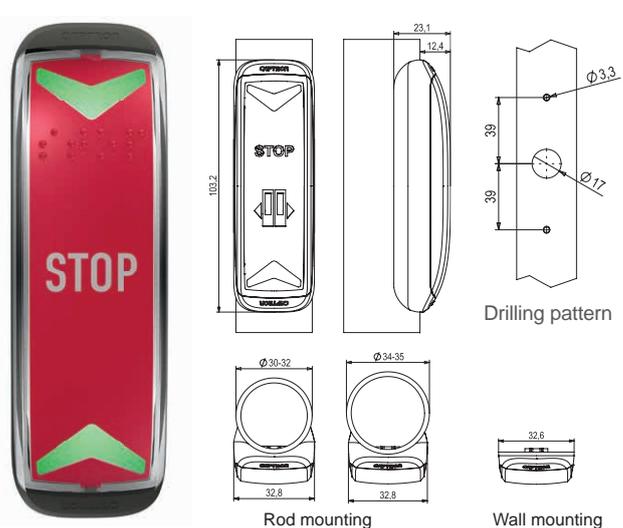

Technical changes

	HWT2	CANEO seriesSR
Voltage drop	max. 2V at 200 mA	max. 2,5V at 100 mA
Current consumption	10 mA at 24 V	max. 10 mA at 24 V (max. 60 mA with signal tone)
LED colors	Green-red	white (green on front side due to symbol foil), red
Storage temperature	-40...+85 °C	-55...+95 °C
Weight	51 g	28 g
Connection	Option 1 / LED function „Automatic“: JST socket, 3-pin Option 2 / LED function „Manual“: JST socket, 2-pin + JST socket, 3-pin	JST socket, 2-pin + JST socket, 3-pin (1 variant, both LED functions can be used via one circuit board)
Options	Tactile pictograms „x“ on housing Tactile pictograms „<>“ on button surface, Braille „STOP“ on button surface	Tactile pictograms not available Braille „STOP“ included on button surface as standard
Mounting holes	Easy conversion to CANEO seriesSR possible without modifications! 1:1 compatibility with existing mounting holes of the HWT2	
Connection cable	Identical connection cables Existing cables can continue to be used when switching	

Changes to ordering and delivery

The **seriesSR stop request button** has a modular design. You assemble your product from **three components** – each with its own item number. Each module is delivered in a separate box.

This allows you to tailor your product to your exact requirements and benefit from maximum flexibility and optimally structured warehousing.

	HWT2	CANEO seriesSR
Order	Complete item with one item number	3 individual components , each with its own item number (see illustration below)
Delivery	All components in one package	Each component in individual packaging

